



## No way around this kind of convenience

There's no way that customers will steer clear of the new Presenter Plug-in Low-profile Refrigerated Multideck by Linde. It's a welcome find when hunting for a quick sandwich. Housewives gladly respond to the spontaneous suggestion offered by packed fresh salads.

The brightly illuminated decks of convenience foods are invitingly visible from the front and sides. Glass shelves create the "There's plenty" look that's hard to resist.



Plug-in low-profile refrigerated multideck designed for bonus business:

## Presenter ..45

**Presenter 1045** is usable for **Climate Class 4 display** as well as Climate Class 3.


Three **transparent glass shelves** fitted as standard.

40 mm **scanner price marking** rails for all display decks. Product stops on glass shelves.

**Display shelves** adjustable for height and slope.

**Environmentally friendly** due to use of R 404 A refrigerant and pentane as the insulation foaming agent, eliminating ozone depletion potential from construction and operation of the multidecks.

**Self-contained plug-in unit**, small space requirement.

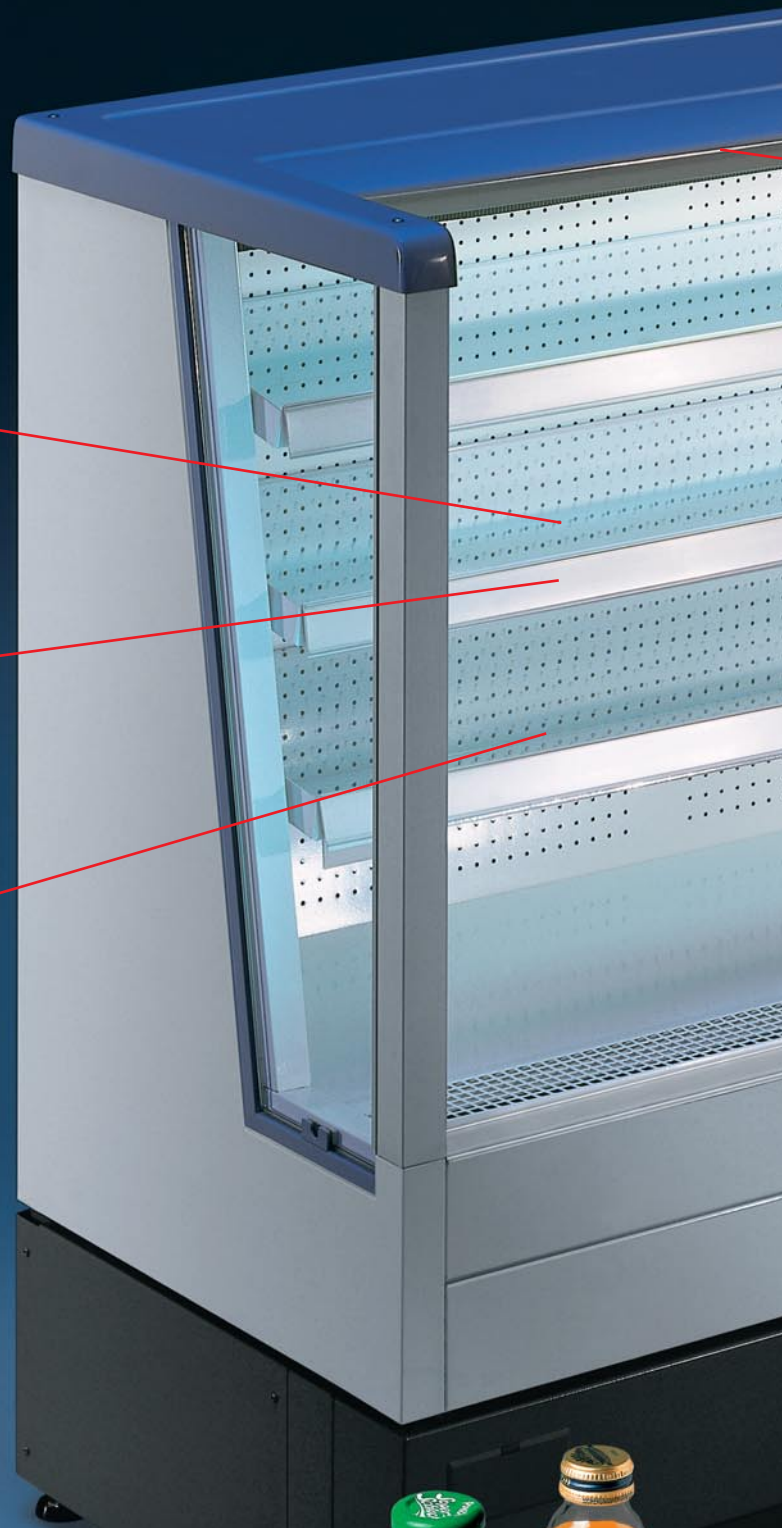



**Optimized access** for customers by cutaway top panel and no obstructive glass framing.

Displays enticingly illuminated by **horizontal and vertical lighting**.

Glazed end walls allowing **good view of contents** from both sides. Flexible siting within individual store layouts. **Matched system design** enables flush integration or multiplexing with Linde non-refrigerated display cabinets. Absence of crevices facilitates easy cleaning.

Body finish available in **10 standard colors**.

**Energy-saving throughout**. Drip water evaporated by heat rejected from refrigeration system instead of electric heater.

**Linde refrigeration**: Highly functional with reliable temperature control.

**Toe recess in base** lets customers step right close to products on display.



# Grouped or in-line: **Presenter** is perfect in every configuration:

## **Presenter 1945** without illuminated signage header

- Extra space on top for non-refrigerated product display or decoration



## **Presenter 1945** with illuminated signage header

- Excellent long-range eyecatcher and guidepost
- Strong impulse buying effect



## **Back-to-back siting**

- Offers 200% more display area than an island case
- Many times larger product assortment in almost the same footprint

Ideal for merchandising the ever widening range of convenience foods.

## **Presenter 1945** line-up





▲  
Attractive presentation on a broad front  
**Presenter 1945 line-up** with signage headers



# Accessories and applications



Illuminated signage header to attract attention from a distance and for customized design



Rear wall panel to permit exposed siting



Stainless steel internal fittings, three shelves optionally glass or stainless steel



Presenter with external paneling and internal fittings of stainless steel



Caster-wheel base for ready resiting.





Space to stock 352 cans of 33 ml size



Variety in prepared salads –  
95 packages and more



Customers can take their pick from 110  
or so sandwiches, rolls or baguettes

## Presenter in 3 basic lengths




**Presenter 1045**  
(Length 990 mm)


**Presenter 1345**  
(Length 1250 mm)

**Presenter 1945**  
(Length 1875 mm)

## Measurements

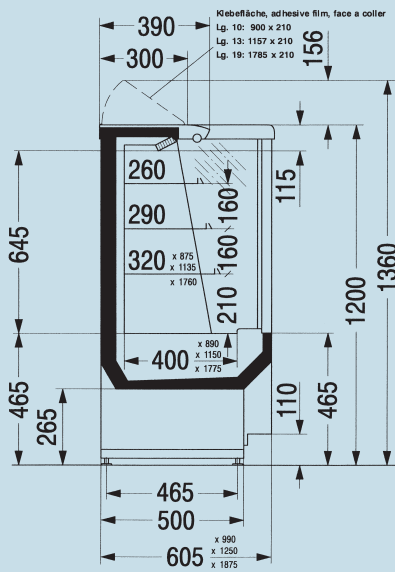

**Presenter with level shelves,  
adjustable for height and slope**

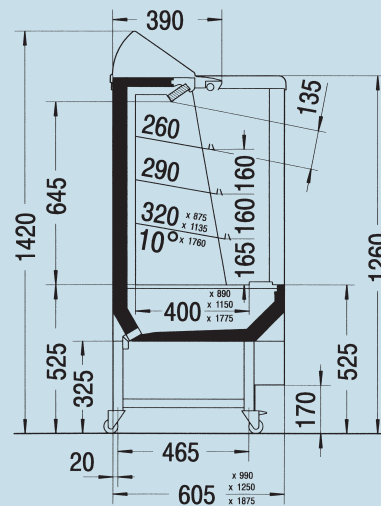

**Presenter with 10° sloping  
shelves and caster base**

| Data                  |                   | Presenter 1045 | Presenter 1345 | Presenter 1945 |
|-----------------------|-------------------|----------------|----------------|----------------|
| Length over end walls | [mm]              | 990            | 1250           | 1875           |
| Display area          | [m <sup>2</sup> ] | 1.20           | 1.49           | 2.12           |
| Temperature range     | [°C]              |                | 0 to 8         |                |
| Ambient conditions    | [°C/%RH]          | 25/60          | 25/60          | 25/60          |
| Power supply          | [V]/[Hz]          | 230/50         | 230/50         | 230/50         |
| Fuse rating           | [A]               | 13             | 13             | 16             |
| Refrigerant           |                   |                | R 404 A        |                |

Linde Kältetechnik GmbH & Co. KG  
Sürther Hauptstrasse 173  
50999 Cologne  
Germany  
Phone +49-22 36-6 01-01  
Telefax +49-22 36-6 01-1 54  
www.linde-refrigeration.com  
info@linde-kt.de

